


SMART LIGHT PANELS INSTALLATION INSTRUCTION



250 MM

Easy connection with chip

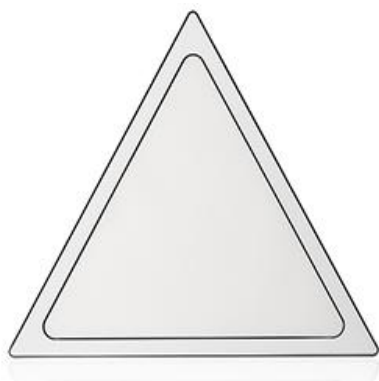

ACCESSORIES



Light Panel X 9PCS



DC Line X 1PC



LED Chip X 9PCS




Controller X 1PC



Adapter X 1PC



3M Tape X 30PCS

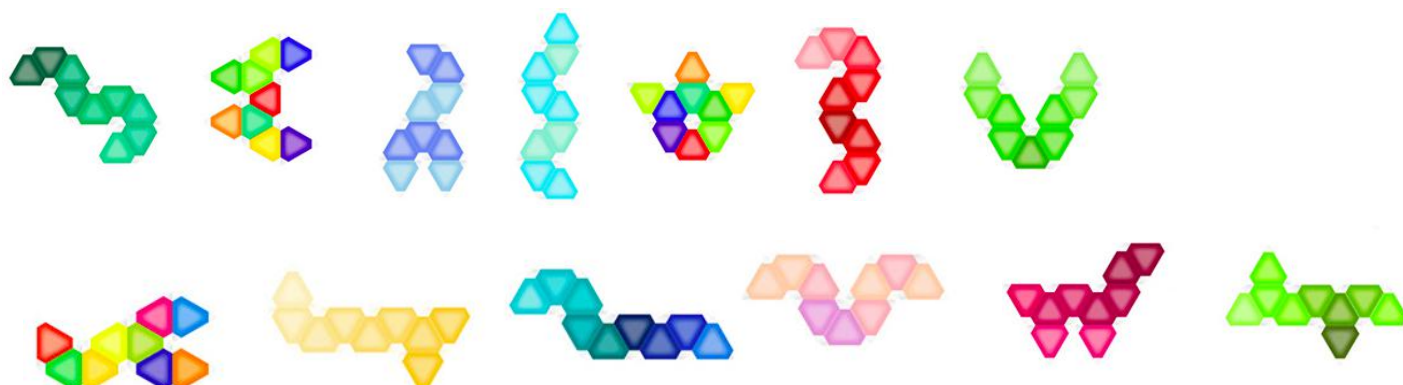

INSTALLATION



1. Used the power adapter connect the controller.



2. Used the controller connect the smart light panel.



3. Make the first panel bright up.



4. Used the chips connect each panel.




5. Clean up before the installation.



6. Used the 3M tape to stick and press 10 seconds to fix.



1. The Light panel of Triangular react to your touch personalize touch commands in the app.
2. Connect Light Triangular together along any edge to create your design.
3. Activate Rhythm Mode and watch your Light Triangular react to sound.
4. Works out of the box, but personalize your experience with the optional App.
5. Automate your Light Triangular by programming schedules using the App.

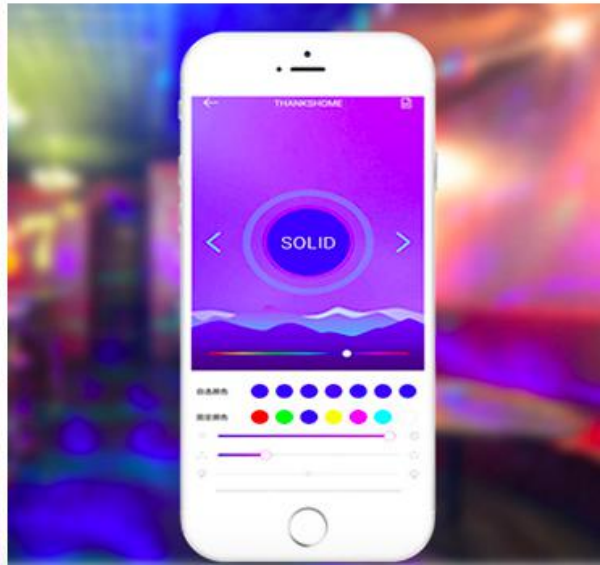

SPECIFICATIONS

Working temperature:-20°C~60°C	Size: 250MM
Voltage: DC 5V	Current:28mA~40Ma
Material: ABS	Color: White
Weight:2.5KG	Certificates:CE ,ROHS, FCC

